

Exponential lower bound on the highest fidelity achievable by quantum error-correcting codes

Mitsuru Hamada*

Quantum Computation and Information Project (ERATO)

Japan Science and Technology Corporation, 5-28-3, Hongo, Bunkyo-ku, Tokyo 113-0033, Japan

(Dated: Sep. 21, 2001; Received, Phys. Rev.: Oct. 12, 2001; Published, Phys. Rev. A, **65**, 052305, Apr. 15, 2002)

On a class of quantum channels which includes the depolarizing channel, the highest fidelity of quantum error-correcting codes of length n and rate R is proven to be lower bounded by $1 - \exp[-nE(R) + o(n)]$ for some function $E(R)$. The $E(R)$ is positive below some threshold R_0 , which implies R_0 is a lower bound on the quantum capacity.

PACS numbers: 03.67.Lx, 03.67.Hk, 89.70.+c

I. INTRODUCTION

Quantum error-correcting codes (simply called codes in this paper) are deemed indispensable for quantum computation as schemes that protect quantum states from decoherence. An information theoretic problem relevant to such codes is one of determining the quantum capacity of a channel, which is far from settled [1, 2, 3, 4, 5]. This paper treats a problem closely related to the quantum capacity. The corresponding problem in classical information theory is that of determining the the highest error exponent, called the *reliability function*, of a channel [6, 7], which is briefly reviewed here. A classical memoryless channel over a finite alphabet $\mathcal{X}$ is a set of conditional probabilities $\{W(v|u)\}_{u,v \in \mathcal{X}}$. A classical code is a pair $(\mathcal{C}, \mathcal{D})$ consisting of a codeword set $\mathcal{C} \subseteq \mathcal{X}^n$ and a decoding map $\mathcal{D} : \mathcal{X}^n \rightarrow \mathcal{C}$. The performance of a classical code is evaluated in terms of maximum decoding error probability

$$P_e(\mathcal{C}, \mathcal{D}) = \max_{x \in \mathcal{C}} \sum_{y: \mathcal{D}(y) \neq x} W^n(y|x),$$

where $W^n(y_1 \dots y_n | x_1 \dots x_n) = W(y_1 | x_1) \dots W(y_n | x_n)$. For fixed n and k , let $P_{n,k}^*$ denote the minimum of $P_e(\mathcal{C}, \mathcal{D})$ over all possible choices of $(\mathcal{C}, \mathcal{D})$ with $\log_{d'} |\mathcal{C}| \geq k$, where the base $d' > 1$ is arbitrarily fixed. Shannon's channel coding theorem states that if a rate R is less than the capacity $C(W)$ of the channel W , then $P_{n,Rn}^* \rightarrow 0$. A stronger result of large-deviation theoretic appearance has been known [6, 7, 8, 9]: There exists a function $E_r(R, W)$, called the *random coding exponent* of W , such that

$$\liminf_{n \rightarrow \infty} -\frac{1}{n} \log_{d'} P_{n,Rn}^* \geq E_r(R, W), \quad (1)$$

i.e., $P_{n,Rn}^* \lesssim \exp_{d'}[-nE_r(R, W)]$, and

$$E_r(R, W) > 0 \quad \text{if} \quad R < C(W). \quad (2)$$

The function $E^*(R, W) = \liminf_n -\frac{1}{n} \log_{d'} P_{n,Rn}^*$, which is called the reliability function of W , shows a trade-off between the reliability and data transmission rate of the best codes on channel W . The $E^*(R, W)$ actually equals $E_r(R, W)$ for relatively large rates R , and complete determination of $E^*(R, W)$ is one of the central issues in classical information theory [6, 7, 8, 9]. Note that Shannon's coding theorem directly follows from (1) and (2).

Motivated by this classical issue, this paper presents an exponential lower bound on the highest possible fidelity of a code used on a class of quantum channels, which includes the depolarizing channel often discussed in the literature [2, 3, 10]. This work was inspired by the recent result of Matsumoto and Uyematsu [11], who used an algebraic fact due to Calderbank et al. [12] [Eq. (9) below] to deduce a lower bound on the quantum capacity. This work's approach resembles theirs in that both bounds are shown using random coding arguments [6, 7, 13] based on (9), but differs from [11] in that while [11] uses an analog of minimum Hamming distance decoding, this work employs an analog of minimum entropy decoding [14] together with the method of types from classical information theory [7, 14, 15], which enables us to obtain the exponential bound analogous to (1) in a simple enumerative manner.

II. EXPONENTIAL BOUND ON FIDELITY

We follow the standard formalism of quantum information theory which assumes all possible quantum operations and state changes, including the effects of quantum channels, are described in terms of *completely positive* (CP) linear maps [1, 4, 16]. In this paper, only *trace-preserving completely positive* (TPCP) linear maps are treated. Given a Hilbert space $\mathcal{H}$ of finite dimension, let $\mathcal{L}(\mathcal{H})$ denote the set of linear operators on $\mathcal{H}$. In general, every CP linear map $\mathcal{M} : \mathcal{L}(\mathcal{H}) \rightarrow \mathcal{L}(\mathcal{H})$ has an operator-sum representation $\mathcal{M}(\rho) = \sum_{i \in \mathcal{I}} M_i \rho M_i^\dagger$ for some $M_i \in \mathcal{L}(\mathcal{H})$, $i \in \mathcal{I}$ [1, 16]. When $\mathcal{M}$ is specified by a set of operators $\{M_i\}_{i \in \mathcal{I}}$, which is not unique, in this way, we write $\mathcal{M} \sim \{M_i\}_{i \in \mathcal{I}}$.

Hereafter, $\mathcal{H}$ denotes an arbitrarily fixed Hilbert space

*Electronic address: mitsuru@ieee.org

whose dimension d is a prime number. A quantum channel is a sequence of TPCP linear maps $\{\mathcal{A}_n : \mathcal{L}(\mathcal{H}^{\otimes n}) \rightarrow \mathcal{L}(\mathcal{H}^{\otimes n})\}$. We want a large subspace $\mathcal{C} = \mathcal{C}_n \subseteq \mathcal{H}^{\otimes n}$ in which every state vector remains almost unchanged after the effect of a channel followed by the action of some suitable recovery process. The recovery process is again described as a TPCP linear map $\mathcal{R}_n : \mathcal{L}(\mathcal{H}^{\otimes n}) \rightarrow \mathcal{L}(\mathcal{H}^{\otimes n})$. A pair $(\mathcal{C}_n, \mathcal{R}_n)$ consisting of such a subspace $\mathcal{C}_n$ and a TPCP linear map $\mathcal{R}_n$ is called a *code* and its performance is evaluated in terms of minimum fidelity [3, 4, 17]

$$F(\mathcal{C}_n, \mathcal{R}_n \mathcal{A}_n) = \min_{|\psi\rangle \in \mathcal{C}_n} \langle \psi | \mathcal{R}_n \mathcal{A}_n (|\psi\rangle \langle \psi|) | \psi \rangle,$$

where $\mathcal{R}_n \mathcal{A}_n$ denotes the composition of $\mathcal{A}_n$ and $\mathcal{R}_n$. Throughout, bras $\langle \cdot |$ and kets $|\cdot\rangle$ are assumed normalized. A subspace $\mathcal{C}_n$ alone is also called a code assuming implicitly some recovery operator. Let $F_{n,k}^*(\mathcal{A}_n)$ denote the supremum of $F(\mathcal{C}_n, \mathcal{R}_n \mathcal{A}_n)$ such that there exists a code $(\mathcal{C}_n, \mathcal{R}_n)$ with $\log_d \dim \mathcal{C}_n \geq k$. This paper gives an exponential lower bound on $F_{n,k}^*(\mathcal{A}_n)$, in the case where $\{\mathcal{A}_n\}$ is a slight generalization of the depolarizing channel specified as follows.

Fix an orthonormal basis $\{|0\rangle, \dots, |d-1\rangle\}$ of $\mathcal{H}$. Put $\mathcal{X} = \{0, \dots, d-1\}^2$ and $N_{(i,j)} = X^i Z^j$ for $(i,j) \in \mathcal{X}$, where the unitary operators $X, Z \in \mathcal{L}(\mathcal{H})$ are defined by

$$X|j\rangle = |(j-1) \bmod d\rangle, \quad Z|j\rangle = \omega^j |j\rangle \quad (3)$$

with ω being a primitive d -th root of unity [18, 19]. The $\{N_u\}_{u \in \mathcal{X}}$ is a basis of $\mathcal{L}(\mathcal{H})$ and a generalization of the Pauli operators (including the identity) in that when $d = 2$, the basis $\{I, X, XZ, Z\}$ is the same as the set of Pauli operators up to a phase factor. For simplicity, we confine ourselves to treating analogs of what are called memoryless channels in classical information theory, i.e., those $\{\mathcal{A}_n\}$ such that $\mathcal{A}_n = \mathcal{A}^{\otimes n}$, $n = 1, 2, \dots$, for some $\mathcal{A} : \mathcal{L}(\mathcal{H}) \rightarrow \mathcal{L}(\mathcal{H})$; such a channel $\{\mathcal{A}^{\otimes n}\}$ is referred to as the memoryless channel $\mathcal{A}$. In addition, we treat only channels that can be written as $\mathcal{A} \sim \{\sqrt{P(u)} N_u\}_{u \in \mathcal{X}}$, where P is a probability distribution on $\mathcal{X}$. This restriction is mainly due to that the codes to be proven to have the desired performance are *symplectic (stabilizer, or additive) codes* [12, 18, 19, 20, 21, 22], which exploit some algebraic property of the basis $\{N_u\}_{u \in \mathcal{X}}$, and that analysis of code performance naturally turns out to be easy for this class of channels. Analysis for a wider class of channels will be given in future papers.

As is usual in information theory, the classical informational divergence or relative entropy is denoted by D and entropy by H [7, 15]: for probability distributions P and Q on a finite set $\mathcal{X}$, $D(P||Q) = \sum_{x \in \mathcal{X}} P(x) \log_d [P(x)/Q(x)]$ and $H(Q) = -\sum_{x \in \mathcal{X}} Q(x) \log_d Q(x)$. This paper's main result is

Theorem 1 *Let integers n, k and a real number R satisfy $0 \leq k \leq Rn$ and $0 \leq R < 1$ (a typical choice is $k = \lfloor Rn \rfloor$ for an arbitrarily fixed rate R). Then, for a memoryless channel $\mathcal{A} \sim \{\sqrt{P(u)} N_u\}_{u \in \mathcal{X}}$, we have*

$$F_{n,k}^*(\mathcal{A}^{\otimes n}) \geq 1 - (n+1)^{2(d^2-1)} d^{-nE(R,P)}$$

where

$$E(R, P) = \min_Q [D(Q||P) + |1 - H(Q) - R|^+],$$

$|x|^+ = \max\{x, 0\}$, and the minimization with respect to Q is taken over all probability distributions on $\mathcal{X}$.

Remarks: An immediate consequence of the theorem is that the quantum capacity [1, 2, 3, 4] of $\mathcal{A}$ is lower bounded by $1 - H(P)$. To see this, observe that $E(R, P)$ is positive for $R < 1 - H(P)$ due to the basic inequality $D(Q||P) \geq 0$ where equality occurs if and only if $Q = P$ [7]. The bound $1 - H(P)$ appeared earlier in [10], Sec. 7.16.2.

Another direct consequence of the theorem is

$$\liminf_{n \rightarrow \infty} -\frac{1}{n} \log_d \{1 - F_{n, \lfloor Rn \rfloor}^*(\mathcal{A}^{\otimes n})\} \geq E(R, P), \quad (4)$$

which resembles (1). In fact, we can see that $E(R, P)$ is closely related to $E_r(R, W)$ in (1) as follows. A specific form of E_r is $E_r(R, W) = \max_p E_r(R, p, W)$, where

$$E_r(R, p, W) = \min_V [D(V||W|p) + |I(p, V) - R|^+];$$

see [7, 14] for detail. For consistency, we assume all logarithms appearing in the definitions of the rate of a code [6] and functions D, I are to base d . The function $E(R, P)$ coincides with $E_r(R+1, p, W)$ with p being the uniform probability distribution on $\mathcal{X}$ and W being the channel defined by $W(v|u) = P(v-u)$, $u, v \in \mathcal{X} = \mathbb{F}_d^2$, where $\mathbb{F}_d$ denotes the finite field consisting of d elements. Rewriting $E_r(R, p, W)$ into the other well-known form (see [7], pp. 168, 192–193, and [6, 8]), we have another form of E :

$$E(R, P) = \max_{0 \leq \delta \leq 1} -\delta(R-1) - (\delta+1) \log_d \sum_{u \in \mathcal{X}} P(u)^{\frac{1}{\delta+1}}.$$

Furthermore, putting $\hat{P}_\delta(u) = P(u)^{\frac{1}{\delta+1}} / \sum_{v \in \mathcal{X}} P(v)^{\frac{1}{\delta+1}}$, $u \in \mathcal{X}$, and $R_\delta = 1 - H(\hat{P}_\delta)$, we obtain

$$E(R, P) = \begin{cases} -R + 1 - 2 \log_d \sum_u P(u)^{\frac{1}{2}} & \text{if } 0 \leq R < R_1, \\ D(\hat{P}_{\delta^*} || P) & \text{if } R_1 \leq R < R_0, \\ 0 & \text{if } R_0 \leq R, \end{cases}$$

where δ^* is a δ with $R_\delta = R$; see FIG. 1.

III. QUANTUM ERROR-CORRECTING CODES

To prove the theorem, we use a lemma on codes for quantum channels. We can regard the index of $N_{(i,j)} = X^i Z^j$, $(i,j) \in \mathcal{X}$, as a pair of elements from the field $\mathbb{F} = \mathbb{F}_d = \mathbb{Z}/d\mathbb{Z}$. From these, we obtain a basis $\mathbf{N}_n = \{N_x \mid x \in (\mathbb{F}^2)^n\}$ of $\mathcal{L}(\mathcal{H}^{\otimes n})$, where $N_x = N_{x_1} \otimes \dots \otimes N_{x_n}$ for $x = (x_1, \dots, x_n) \in (\mathbb{F}^2)^n$. We write N_J for $\{N_x \in \mathbf{N}_n \mid x \in J\}$ where $J \subseteq (\mathbb{F}^2)^n$. The index of a basis element

$$((u_1, v_1), \dots, (u_n, v_n)) \in (\mathbb{F}^2)^n$$

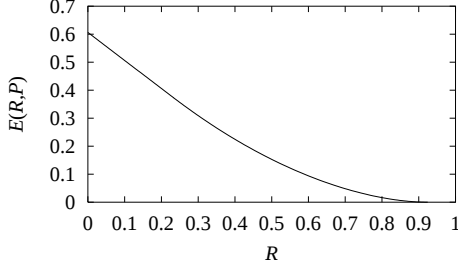


FIG. 1: The function $E(R, P)$ for the depolarizing channel, where $d = 2$ and $P((0, 0)) = 1 - 3\varepsilon$, $P(u) = \varepsilon$ for $u \neq (0, 0)$, $u \in \mathcal{X} = \{0, 1\}^2$, with $\varepsilon = 0.0025$.

can be regarded as the plain $2n$ -dimensional vector

$$x = (u_1, v_1, \dots, u_n, v_n) \in \mathbb{F}^{2n}.$$

We can equip the vector space $\mathbb{F}^{2n}$ over $\mathbb{F}$ with a *symplectic pairing* (bilinear form, or inner product) defined by

$$(x, y)_{\text{sp}} = \sum_{i=1}^n u_i v'_i - v_i u'_i$$

for the above x and $y = (u'_1, v'_1, \dots, u'_n, v'_n) \in \mathbb{F}^{2n}$ [23, 24]. Given a subspace $L \subseteq \mathbb{F}^{2n}$, let

$$L^\perp = \{x \in \mathbb{F}^{2n} \mid \forall y \in L, (x, y)_{\text{sp}} = 0\}.$$

Lemma 1 [12] *Let a subspace $L \subseteq \mathbb{F}^{2n}$ satisfy $L \subseteq L^\perp$ and $\dim L = n - k$. Choose a set $J \subseteq \mathbb{F}^{2n}$, not necessarily linear, such that*

$$\{y - x \mid x \in J, y \in J\} \subseteq (L^\perp \setminus L)^c,$$

where the superscript C denotes complement. Then, there exist d^k -dimensional N_J -correcting codes.

The codes in the lemma have the form $\{\psi \in \mathbb{H}^{\otimes n} \mid \forall M \in N_L, M\psi = \tau(M)\psi\}$ with some scalars $\tau(M)$, $M \in N_L$. A precise definition of N_J -correcting codes can be found in Sec. III of [17] and the above lemma has been verified with Theorem III.2 therein. Most constructions of quantum error-correcting codes relies on this lemma, which is valid even if d is a prime other than two [18, 19, 21, 22].

Now, for a memoryless channel $\mathcal{A} \sim \{\sqrt{P(u)}N_u\}_{u \in \mathcal{X}}$, and an N_J -correcting code $\mathcal{C} \subseteq \mathbb{H}^{\otimes n}$, write

$$F(\mathcal{C}) = \sup_{\mathcal{R}_n} F(\mathcal{C}, \mathcal{R}_n \mathcal{A}^{\otimes n})$$

where $\mathcal{R}_n$ ranges over all TPCP linear maps on $\mathbb{L}(\mathbb{H}^{\otimes n})$. Then, since a recovery operator $\mathcal{R}_n$ can be constructed explicitly so as to correct all errors in N_J , as in the proof of Theorem III.2 of [17], we have

$$1 - F(\mathcal{C}) \leq \sum_{x \notin J} P^n(x), \quad (5)$$

where we have written $P^n(x_1 \dots x_n)$ for $P(x_1) \dots P(x_n)$.

IV. PROOF OF THEOREM 1

We employ the method of types [7, 14, 15], on which a few basic facts to be used are collected here. For $x = (x_1, \dots, x_n) \in \mathcal{X}^n$, define a probability distribution P_x on $\mathcal{X}$ by

$$P_x(u) = |\{i \mid 1 \leq i \leq n, x_i = u\}|/n, \quad u \in \mathcal{X},$$

which is called the *type* (empirical distribution) of x . With $\mathcal{X}$ fixed, the set of all possible types of sequences from $\mathcal{X}^n$ is denoted by $\mathcal{Q}_n(\mathcal{X})$ or simply by $\mathcal{Q}_n$. For a type $Q \in \mathcal{Q}_n$, $\mathcal{T}_Q^n$ is defined as $\{x \in \mathcal{X}^n \mid P_x = Q\}$. In what follows, we use

$$|\mathcal{Q}_n| \leq (n+1)^{|\mathcal{X}|-1}, \quad \text{and} \quad \forall Q \in \mathcal{Q}_n, |\mathcal{T}_Q^n| \leq d^{nH(Q)}. \quad (6)$$

Note that if $x \in \mathcal{X}^n$ has type Q , then $P^n(x) = \prod_{a \in \mathcal{X}} P(a)^{nQ(a)} = \exp_d\{-n[H(Q) + D(Q||P)]\}$.

We apply Lemma 1 choosing J as follows. Assume $\dim L = n - k$. Then, $\dim L^\perp = n + k$ [23]. From each of the d^{n-k} cosets of $L^\perp$ in $\mathbb{F}^{2n}$, select a vector that minimizes $H(P_x)$, i.e., a vector x satisfying $H(P_x) \leq H(P_y)$ for any y in the coset. This selection uses the idea of the minimum entropy decoder known in the classical information theory literature [14]. Let $J_0(L)$ denote the set of the d^{n-k} selected vectors. If we take J in Lemma 1 as $J(L) = \{z + w \mid z \in J_0(L), w \in L\}$, the condition in the lemma is clearly satisfied. Let

$$\mathbf{A} = \{L \subseteq \mathbb{F}^{2n} \mid L \text{ linear}, L \subseteq L^\perp, \dim L = n - k\},$$

and for each $L \in \mathbf{A}$, let $\mathcal{C}(L)$ be an $N_{J(L)}$ -correcting code existence of which is ensured by Lemma 1. Put

$$\overline{F} = \frac{1}{|\mathbf{A}|} \sum_{L \in \mathbf{A}} F(\mathcal{C}(L)).$$

We will show that $\overline{F}$ is bounded from below by $1 - (n+1)^{2(d^2-1)}d^{-nE(R,P)}$, which establishes the theorem. Such a method for a proof is called random coding [7, 11, 13].

The $\{0, 1\}$ -valued indicator function $\mathbf{1}[T]$ equals 1 if and only if the statement T is true and equals 0 otherwise. From (5), we have

$$\begin{aligned} 1 - \overline{F} &\leq \frac{1}{|\mathbf{A}|} \sum_{L \in \mathbf{A}} \sum_{x \notin J(L)} P^n(x) \\ &= \frac{1}{|\mathbf{A}|} \sum_{L \in \mathbf{A}} \sum_{x \in \mathbb{F}^{2n}} P^n(x) \mathbf{1}[x \notin J(L)] \\ &= \sum_{x \in \mathbb{F}^{2n}} P^n(x) \frac{|\mathbf{B}(x)|}{|\mathbf{A}|}, \end{aligned} \quad (7)$$

where we have put

$$\mathbf{B}(x) = \{L \in \mathbf{A} \mid x \notin J(L)\}, \quad x \in \mathbb{F}^{2n}.$$

The fraction $|\mathbf{B}(x)|/|\mathbf{A}|$ is trivially bounded as

$$\frac{|\mathbf{B}(x)|}{|\mathbf{A}|} \leq 1, \quad x \in \mathbb{F}^{2n}. \quad (8)$$

We use the next inequality [11, 12]. Let

$$\mathbf{A}(x) = \{L \in \mathbf{A} \mid x \in L^\perp \setminus L\}.$$

Then, $|\mathbf{A}(0)| = 0$ and

$$\frac{|\mathbf{A}(x)|}{|\mathbf{A}|} \leq \frac{1}{d^{n-k}}, \quad x \in \mathbb{F}^{2n}, \quad x \neq 0. \quad (9)$$

Since $\mathbf{B}(x) \subseteq \{L \in \mathbf{A} \mid \exists y \in \mathbb{F}^{2n}, H(\mathbf{P}_y) \leq H(\mathbf{P}_x), y - x \in L^\perp \setminus L\}$ from the design of $J(L)$ specified above (cf. [13]),

$$\begin{aligned} |\mathbf{B}(x)| &\leq \sum_{y \in \mathbb{F}^{2n}: H(\mathbf{P}_y) \leq H(\mathbf{P}_x), y \neq x} |\mathbf{A}(y - x)| \\ &\leq \sum_{y \in \mathbb{F}^{2n}: H(\mathbf{P}_y) \leq H(\mathbf{P}_x), y \neq x} |\mathbf{A}| d^{-n+k}, \end{aligned} \quad (10)$$

where we have used (9) for the latter inequality. Combining (7), (8) and (10), we can proceed as follows with the aid of the basic inequalities in (6) and the inequality $\min\{a + b, 1\} \leq \min\{a, 1\} + \min\{b, 1\}$ for $a, b \geq 0$.

$$\begin{aligned} 1 - \bar{F} &\leq \sum_{x \in \mathbb{F}^{2n}} P^n(x) \min \left\{ \sum_{y \in \mathbb{F}^{2n}: H(\mathbf{P}_y) \leq H(\mathbf{P}_x), y \neq x} d^{-(n-k)}, 1 \right\} \\ &\leq \sum_{Q \in \mathcal{Q}_n} |\mathcal{T}_Q^n| \prod_{a \in \mathcal{X}} P(a)^{nQ(a)} \min \left\{ \sum_{Q' \in \mathcal{Q}_n: H(Q') \leq H(Q)} \frac{|\mathcal{T}_{Q'}^n|}{d^{n(1-R)}}, 1 \right\} \\ &\leq \sum_{Q \in \mathcal{Q}_n} \exp_d[-nD(Q||P)] \sum_{Q' \in \mathcal{Q}_n: H(Q') \leq H(Q)} \exp_d[-n|1 - R - H(Q')|^+] \\ &\leq \sum_{Q \in \mathcal{Q}_n} \exp_d[-nD(Q||P)] |\mathcal{Q}_n| \max_{Q' \in \mathcal{Q}_n: H(Q') \leq H(Q)} \exp_d[-n|1 - R - H(Q')|^+] \\ &= \sum_{Q \in \mathcal{Q}_n} |\mathcal{Q}_n| \exp_d[-nD(Q||P) - n|1 - R - H(Q)|^+] \\ &\leq (n+1)^{2(d^2-1)} \exp_d[-nE(R, P)], \end{aligned}$$

which is the promised bound.

V. CONCLUDING REMARK

This author conjectures that the bound in (4) is not tight in view of the existence of the Shor-Smolín codes [3].

Acknowledgments

The author would like to thank R. Matsumoto for valuable information on algebraic matters, discussions, com-

ments, and especially, pointing out an error in the earlier manuscript, M. Hayashi and K. Matsumoto for helpful comments, and H. Imai for support.

-
- [1] B. Schumacher, Phys. Rev. A **54**, 2614 (1996), quant-ph/9604023.
 - [2] C. H. Bennett, D. P. DiVincenzo, J. A. Smolin, and W. K. Wootters, Phys. Rev. A **54**, 3824 (1996), quant-ph/9604024.
 - [3] D. P. DiVincenzo, P. W. Shor, and J. A. Smolin, Phys. Rev. A **57**, 830 (1998), quant-ph/9706061.
 - [4] H. Barnum, E. Knill, and M. A. Nielsen, IEEE Trans. Inf. Theory **46**, 1317 (2000), quant-ph/9809010.
 - [5] P. W. Shor, Phys. Rev. A **52**, R2493 (1995).
 - [6] R. G. Gallager, *Information Theory and Reliable Communication* (John Wiley & Sons, NY, 1968).
 - [7] I. Csiszár and J. Körner, *Information Theory: Coding Theorems for Discrete Memoryless Systems* (Academic,

- NY, 1981).
- [8] R. G. Gallager, IEEE Trans. Inf. Theory **11**, 3 (1965).
 - [9] S. Litsyn, IEEE Trans. Inf. Theory **45**, 385 (1999).
 - [10] J. Preskill, *Lecture notes for physics 229: Quantum information and computation* (1998), URL <http://www.theory.caltech.edu/people/preskill/ph229>.
 - [11] R. Matsumoto and T. Uyematsu, e-Print quant-ph/0105151, LANL (2001).
 - [12] A. R. Calderbank, E. M. Rains, P. W. Shor, and N. J. A. Sloane, Phys. Rev. Lett. **78**, 405 (1997), quant-ph/9605005.
 - [13] V. D. Goppa, Problems of Information Transmission **10**, 89 (1974).
 - [14] I. Csiszár and J. Körner, IEEE Trans. Inf. Theory **27**, 5 (1981).
 - [15] I. Csiszár, IEEE Trans. Inf. Theory **44**, 2505 (1998).
 - [16] M.-D. Choi, Linear Algebra and Its Applications **10**, 285 (1975).
 - [17] E. Knill and R. Laflamme, Phys. Rev. A **55**, 900 (1997), quant-ph/9604034.
 - [18] E. Knill, e-Print quant-ph/9608048, LANL (1996).
 - [19] E. Knill, e-Print quant-ph/9608049, LANL (1996).
 - [20] D. Gottesman, Phys. Rev. A **54**, 1862 (1996), quant-ph/9604038.
 - [21] E. M. Rains, IEEE Trans. Inf. Theory **45**, 1827 (1999), quant-ph/9703048.
 - [22] A. Ashikhmin and E. Knill, IEEE Trans. Inf. Theory **47**, 3065 (2001), quant-ph/0005008.
 - [23] E. Artin, *Geometric Algebra* (Interscience Publisher, New York, 1957).
 - [24] M. Aschbacher, *Finite Group Theory* (Cambridge University Press, Cambridge, UK, 2000), 2nd ed.